

OCEANAIRE

MODEL: 2OACH3612
3 TON DELUXE PORTABLE HEAT PUMP

TECHNICAL SPECIFICATIONS

COOLING CAPACITY	36,050 BTUH
HEATING CAPACITY	32,500 BTUH
VOLTAGE	208-230V, 60Hz, 1PH
AMPS	19.6
TOTAL WATTS	3620
IN RUSH AMPS	113
PLUG TYPE	6-30P, LCDI
EER	10.0
COMPRESSOR	SCROLL
COMPRESSOR HP	3
COMPRESSOR LRA	83
EVAP CFM - HIGH	1200
EVAP MOTOR HP	1/3
COND CFM	1390
COND MOTOR HP	1
CONDENSATE TANK (Pump Optional)	5 GALLON
REFRIGERANT CHARGE	66 oz R-410A
HEIGHT	50-1/4 in
WIDTH	27-1/2 in
DEPTH	35 in
NET WEIGHT	365 lb

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

- OA **Cooling Capacity** is total BTUH at 80°DB/67°WB return air 95°F Outdoor at high fan speed
- OA **Heating Capacity** is total BTUH at 70°DB/60°WB Indoor, 47°DB/43°WB Outdoor
- OA Dedicated Circuit and Time Delay fuses/circuit breakers are recommended
- OA EER is determined at high fan speed, with condenser discharge air ducted into separate area
- OA CFM with free discharge
- OA Amps & Watts at 208 Volts

COOLING AMBIENT **OPERATING RANGE 65° TO 105°**

HEATING AMBIENT **OPERATING RANGE 40° TO 85°**

NOT APPROVED FOR OUTDOOR USE



HEATING & COOLING



Cooling and Heating done Right!

OCEANAIRE



OCEANAIRE-INC.COM
OA-TS-2OACH3612-05012020

PRODUCT FEATURES


- OA SOLID STATE ELECTRONIC CONTROLLER
- OA AUTOMATIC MODE CHANGEOVER
- OA MANUAL OR AUTO 6-SPEED FAN CONTROL
- OA LARGE LED DISPLAY
- OA SWIVEL BALL BEARING CASTERS WITH LOCKING FRONTS
- OA CONDENSATE OVERFLOW ALERT
- OA HIGH PRESSURE SAFETY SWITCH
- OA WASHABLE ELECTROSTATIC AIR FILTERS




Optional ACCESSORIES

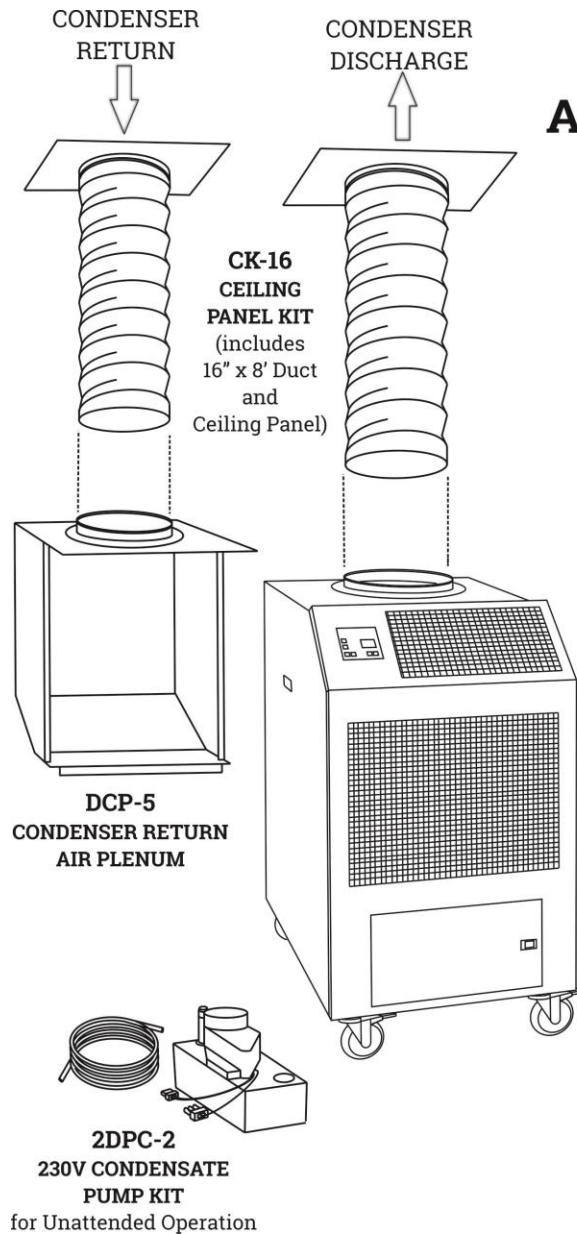

2NK-3 (2 X 8")
NOZZLE KIT
 for Directional
 Cooling/Heating



2DDA-16
DISCHARGE
DUCT ADAPTER
 for Extended
 Single Duct Length



DEP-16
EVAPORATOR RETURN
AIR PLENUM