

# OCEANAIRE

**MODEL: 2OACH3632**  
**3 TON DELUXE PORTABLE HEAT PUMP**

## TECHNICAL SPECIFICATIONS

<b>COOLING CAPACITY</b>	<b>36,050 BTUH</b>
<b>HEATING CAPACITY</b>	<b>32,500 BTUH</b>
VOLTAGE	208-230V, 60Hz, 3PH
AMPS	17.2
TOTAL WATTS	3620
IN RUSH AMPS	93
PLUG TYPE	L15-30P
EER	10.0
COMPRESSOR	SCROLL
COMPRESSOR HP	3
COMPRESSOR LRA	77
EVAP CFM - HIGH	1200
EVAP MOTOR HP	1/3
COND CFM	1390
COND MOTOR HP	1
CONDENSATE TANK (Pump Optional)	5 GALLON
REFRIGERANT CHARGE	66 oz R-410A
HEIGHT	50-1/4 in
WIDTH	27-1/2 in
DEPTH	35 in
NET WEIGHT	365 lb



**HEATING & COOLING**



### SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

- A **Cooling Capacity** is total BTUH at 80°DB/67°WB return air 95°F Outdoor at high fan speed
- A **Heating Capacity** is total BTUH at 70°DB/60°WB Indoor, 47°DB/43°WB Outdoor
- A Dedicated Circuit and Time Delay fuses/circuit breakers are recommended
- A EER is determined at high fan speed, with condenser discharge air ducted into separate area
- A CFM with free discharge
- A Amps & Watts at 208 Volts

**COOLING AMBIENT** OPERATING RANGE 65° TO 105°

**HEATING AMBIENT** OPERATING RANGE 40° TO 85°

**NOT APPROVED FOR OUTDOOR USE**




*Cooling and Heating done Right!*

# OCEANAIRE


OCEANAIRE-INC.COM  
OA-TS-2OACH3632-05012020

## PRODUCT FEATURES


- OA SOLID STATE ELECTRONIC CONTROLLER
- OA AUTOMATIC MODE CHANGEOVER
- OA MANUAL OR AUTO 6-SPEED FAN CONTROL
- OA LARGE LED DISPLAY
- OA SWIVEL BALL BEARING CASTERS WITH LOCKING FRONTS
- OA CONDENSATE OVERFLOW ALERT
- OA HIGH PRESSURE SAFETY SWITCH
- OA THREE PHASE MONITOR
- OA WASHABLE ELECTROSTATIC AIR FILTERS

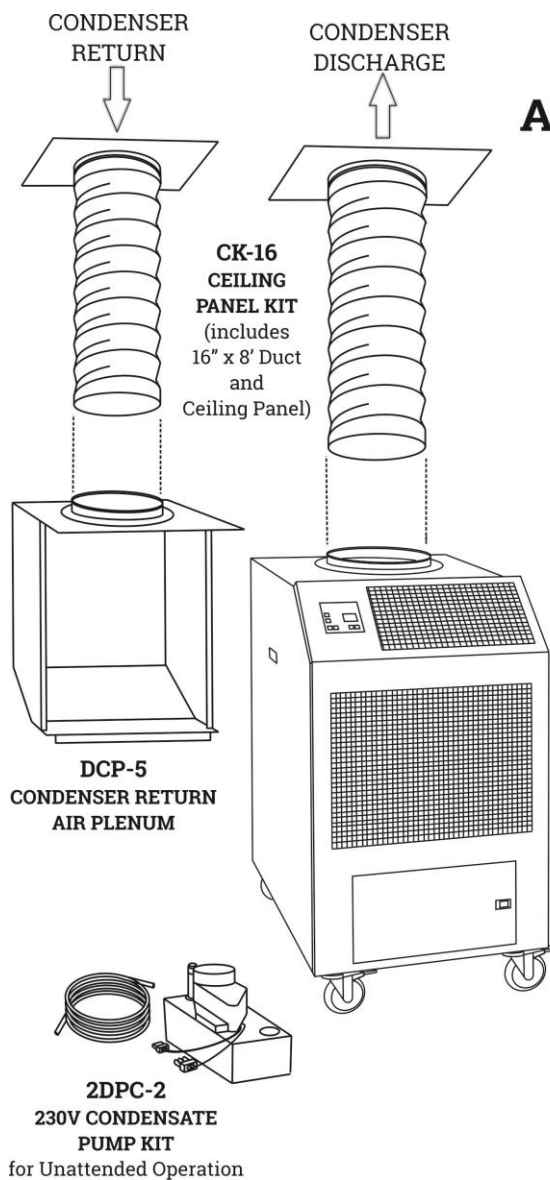


## Optional ACCESSORIES



**2NK-3 (2 X 8")**  
**NOZZLE KIT**  
for Directional  
Cooling/Heating



**2DDA-16**  
**DISCHARGE**  
**DUCT ADAPTER**  
for Extended  
Single Duct Length



**DEP-16**  
**EVAPORATOR RETURN**  
**AIR PLENUM**