OCEANAIRE

TECHNICAL SPECIFICATIONS

COOLING CAPACITY	36,100 BTUH
VOLTAGE AMPS TOTAL WATTS	460V, 60Hz, 3PH 4.7 2700
IN RUSH AMPS PLUG TYPE EER	48 L16-20P 13.4
COMPRESSOR COMPRESSOR HP COMPRESSOR LRA	SCROLL 3 35
EVAP CFM - HIGH EVAP MOTOR HP	1200 1/3
CONDENSER WATER FLOW AT 60°F WATER IN AT 85°F WATER IN	2.2 GPM 9 GPM
WATER LINE CONNECTIONS WATER IN WATER OUT DRAIN CONDENSATE BEMOVAL	5/8 MF 5/8 MF 3/8 MF PUMP AUTOMATIC
CONDENSATE REMOVAL	20' VERTICAL LIFT
REFRIGERANT CHARGE	24 oz R-410A
HEIGHT WIDTH DEPTH	50-14 in 28-1/4 in 18 in
NET WEIGHT	310 lb

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

- OA Cooling Capacity is total BTUH at 80°DB/67°WB return air with 85°EWT and 105°LWT
- OA Dedicated Circuit and Time Delay fuses/circuit breakers are recommended
- OA EER is determined at high fan speed
- OA CFM with free discharge
- OA Amps & Watts at 460 Volts

COOLING AMBIENT OPERATING RANGE 65° TO 105° NOT APPROVED FOR OUTDOOR USE



MODEL: OWC3634 3 TON DELUXE PORTABLE WATER-COOLED AIR CONDITIONER









OCEANAIRE-INC.COM OA-TS-OWC3634-05012020


OCEANAIRE

PRODUCT FEATURES

- OA SOLID STATE ELECTRONIC CONTROLLER
- OA MANUAL OR AUTO 6-SPEED FAN CONTROL
- OA LARGE LED DISPLAY
- OA SWIVEL BALL BEARING CASTERS WITH LOCKING FRONTS
- OA INTERNAL CONDENSATE PUMP WITH OVERFLOW ALERT
- OA WATER REGULATING VALVE
- OA HIGH PRESSURE SAFETY SWITCH
- OA WASHABLE ELECTROSTATIC AIR FILTER
- OA THREE PHASE MONITOR



MODEL: OWC3634 3 TON DELUXE PORTABLE WATER-COOLED AIR CONDITIONER

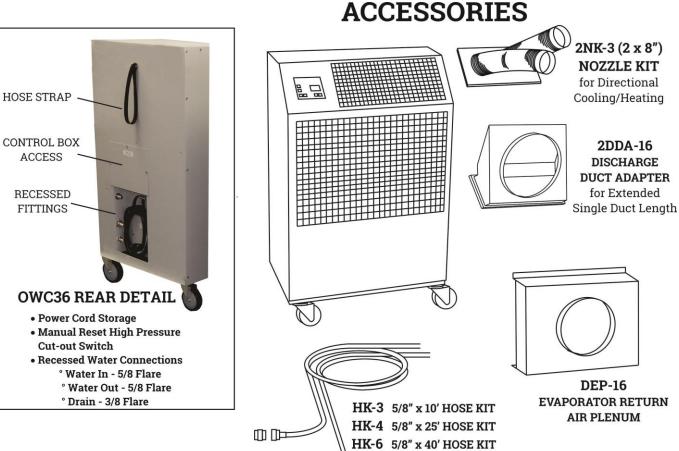

Cooling done Right! FANAIRE OCEANAIRE-INC COM OA-TS-OWC3634-05012020

)