

## MODEL: OWC6012

5 TON DELUXE PORTABLE
WATER-COOLED AIR CONDITIONER

## TECHNICAL SPECIFICATIONS

COOLING CAPACITY 60,100 BTUH

VOLTAGE 208-230V, 60Hz, 1PH

AMPS 23.7 TOTAL WATTS 5000 IN RUSH AMPS 165

PLUG TYPE 6-30P, LCDI

EER 12.0

COMPRESSOR SCROLL

COMPRESSOR HP 5
COMPRESSOR LRA 158
EVAP CFM - HIGH 1950
EVAP MOTOR HP 1

CONDENSER WATER FLOW

AT 60°F WATER IN 3.8 GPM AT 85°F WATER IN 15 GPM

WATER LINE CONNECTIONS

WATER IN 5/8 MF WATER OUT 5/8 MF DRAIN 3/8 MF

CONDENSATE REMOVAL PUMP AUTOMATIC

20' VERTICAL LIFT

REFRIGERANT CHARGE 52 oz R-410A

HEIGHT 51-1/2 in WIDTH 27 in DEPTH 29 in NET WEIGHT 375 lb

## SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

- OA Cooling Capacity is total BTUH at 80°DB/67°WB return air with 85°EWT and 105°LWT
- OA Dedicated Circuit and Time Delay fuses/circuit breakers are recommended
- OA EER is determined at high fan speed
- OA CFM with free discharge
- Amps & Watts at 208 Volts

COOLING AMBIENT OPERATING RANGE 65° TO 105°

NOT APPROVED FOR OUTDOOR USE



OA-TS-OWC6012-05012020












# MODEL: OWC6012

## **5 TON DELUXE PORTABLE** WATER-COOLED AIR CONDITIONER


## **PRODUCT FEATURES**

- OA SOLID STATE ELECTRONIC CONTROLLER
- MANUAL OR AUTO 6-SPEED FAN CONTROL
- OA LARGE LED DISPLAY
- OA SWIVEL BALL BEARING CASTERS WITH LOCKING FRONTS
- M INTERNAL CONDENSATE PUMP WITH OVERFLOW ALERT
- MATER REGULATING VALVE
- OA HIGH PRESSURE SAFETY SWITCH
- MASHABLE ELECTROSTATIC AIR FILTER



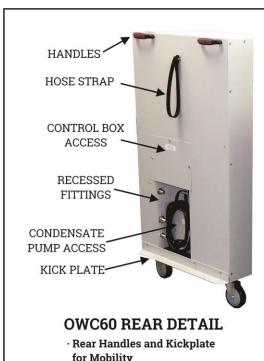

- for Mobility
- · Power Cord Storage
- · Manual Reset
- **High Pressure Cut-out Switch**
- · Recessed Water Connections
  - ° Water In 5/8 Flare
  - ° Water Out 5/8 Flare
  - ° Drain 3/8 Flare

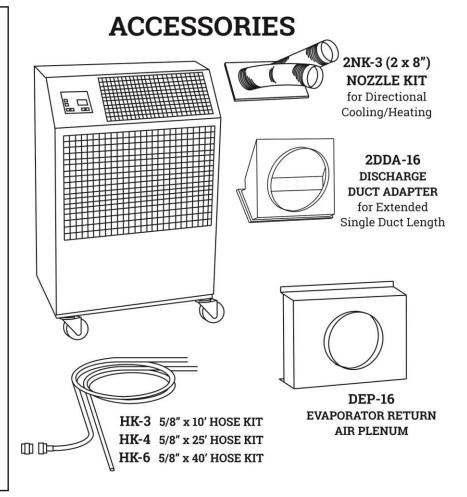



OCEANAIRE-INC COM OA-TS-OWC6012-05012020