OCEANAIRE,

MODEL: OWC6032 **5 TON DELUXE PORTABLE** WATER-COOLED AIR CONDITIONER

WATER COOLED

TECHNICAL SPECIFICATIONS

| COOLING CAPACITY | 60,100 BTUH |
|--|-------------------------------------|
| VOLTAGE AMPS TOTAL WATTS | 208-230V, 60Hz, 3PH 16.5 5000 |
| IN RUSH AMPS PLUG TYPE EER | 149 L15-30P 12.0 |
| COMPRESSOR COMPRESSOR HP COMPRESSOR LRA | SCROLL 5 137 |
| EVAP CFM - HIGH EVAP MOTOR HP | 1950 1 |
| CONDENSER WATER FLOW AT 60°F WATER IN AT 85°F WATER IN | 3.8 GPM 15 GPM |
| WATER LINE CONNECTIONS WATER IN WATER OUT DRAIN | 5/8 MF 5/8 MF 3/8 MF |
| CONDENSATE REMOVAL | PUMP AUTOMATIC 20' VERTICAL LIFT |
| REFRIGERANT CHARGE | 52 oz R-410A |
| HEIGHT WIDTH DEPTH | 51-1/2 in 27 in 29 in |
| NET WEIGHT | 375 lb |

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

OA Cooling Capacity is total BTUH at 80°DB/67°WB return air with 85°EWT and 105°LWT

- OA Dedicated Circuit and Time Delay fuses/circuit breakers are recommended
- OA EER is determined at high fan speed
- OA CFM with free discharge
- OA Amps & Watts at 208 Volts

OPERATING RANGE 65° TO 105° COOLING AMBIENT NOT APPROVED FOR OUTDOOR USE










OA-TS-OWC6032-05012020


OCEANAIRE

PRODUCT FEATURES


- **OA SOLID STATE ELECTRONIC CONTROLLER**
- OA MANUAL OR AUTO 6-SPEED FAN CONTROL
- OA LARGE LED DISPLAY
- OA SWIVEL BALL BEARING CASTERS WITH LOCKING FRONTS
- OA INTERNAL CONDENSATE PUMP WITH OVERFLOW ALERT
- OA WATER REGULATING VALVE
- **OA HIGH PRESSURE SAFETY SWITCH**
- OA WASHABLE ELECTROSTATIC AIR FILTER
- **OA THREE PHASE MONITOR**





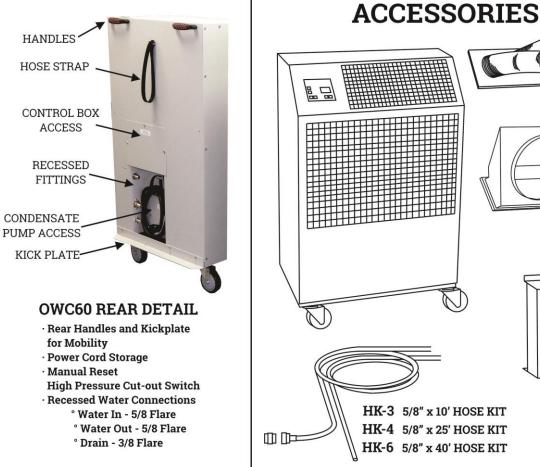

2NK-3 (2 x 8") NOZZLE KIT for Directional Cooling/Heating



2DDA-16 DISCHARGE DUCT ADAPTER for Extended Single Duct Length



EVAPORATOR RETURN AIR PLENUM

Cooling done Right! FANAIRE OCEANAIRE-INC COM OA-TS-OWC6032-05012020