

TECHNICAL SPECIFICATIONS

COOLING CAPACITY	11,800 BTUH
VOLTAGE	115V, 60Hz, 1PH
AMPS	10.4
TOTAL WATTS	1180
IN RUSH AMPS	60
PLUG TYPE	5-15P, LCDI
EER	10.0
COMPRESSOR	ROTARY
COMPRESSOR HP	1
COMPRESSOR LRA	50
EVAP CFM - HIGH	400
EVAP MOTOR HP	1/8
COND CFM	580
COND MOTOR HP	1/8
CONDENSATE TANK (Pump Optional)	5 GALLON
REFRIGERANT CHARGE	18 oz R-410A
HEIGHT	37-3/4 in
WIDTH	20 in
DEPTH	25 in
NET WEIGHT	180 lb



AIR COOLED



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

- OA **Cooling Capacity** is total BTUH at 80°DB/67°WB return air 95°F Outdoor at high fan speed
- OA Dedicated Circuit and Time Delay fuses/circuit breakers are recommended
- OA EER is determined at high fan speed, with condenser discharge air ducted into separate area
- OA CFM with free discharge
- OA Amps & Watts at 115 Volts

COOLING AMBIENT **OPERATING RANGE 65° TO 105°**

NOT APPROVED FOR OUTDOOR USE



Cooling done Right!
OCEANAIRE



OCEANAIRE-INC.COM
OA-TS-PAC1211-05012020

PRODUCT FEATURES


- OA 24 VOLT NON-PROGRAMMABLE ELECTRONIC THERMOSTAT
- OA SWIVEL BALL BEARING CASTERS WITH LOCKING FRONTS
- OA 2-SPEED FAN SWITCH
- OA CONDENSATE OVERFLOW ALERT LIGHT
- OA HIGH PRESSURE SAFETY SWITCH
- OA WASHABLE ELECTROSTATIC AIR FILTER




Optional ACCESSORIES

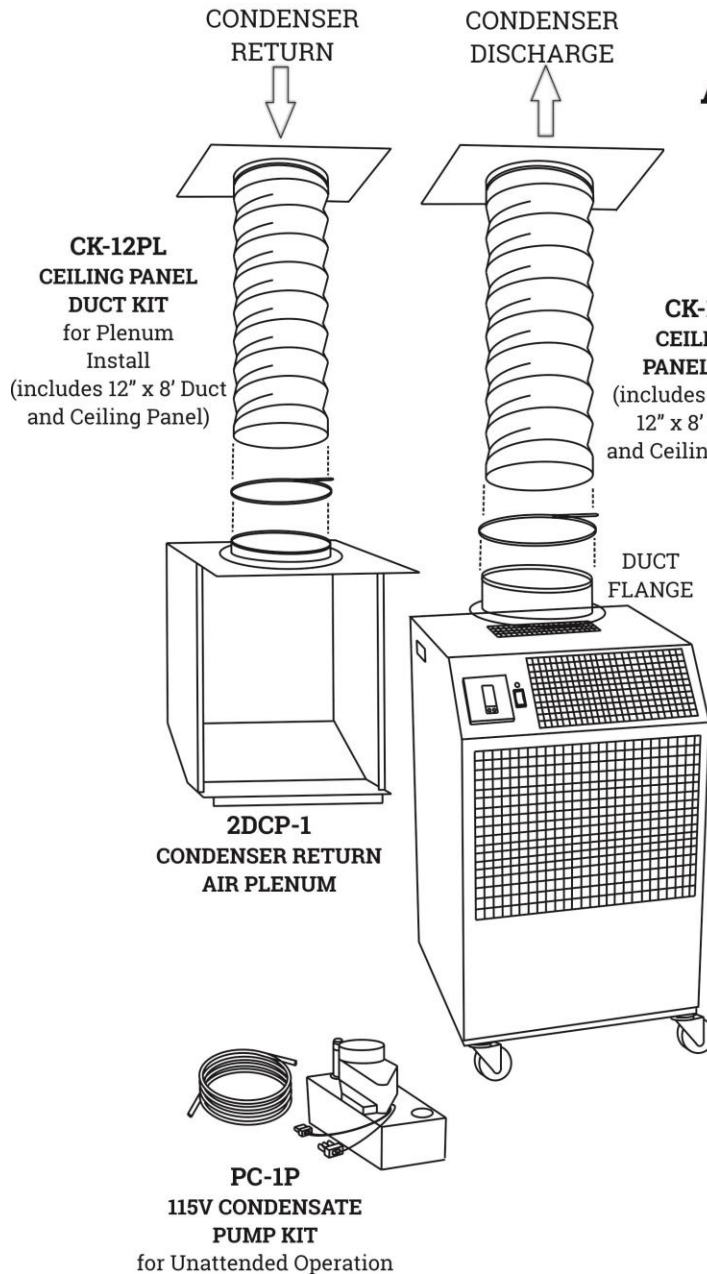

2NK-1 (2 X 4") NOZZLE KIT
for Directional Cooling/Heating



2DDA-6 DISCHARGE DUCT ADAPTER
for Extended Single Duct Length



DEP-10 EVAPORATOR RETURN AIR PLENUM

Cooling done Right!
OCEANAIRE