

TECHNICAL SPECIFICATIONS

COOLING CAPACITY 36,050 BTUH

VOLTAGE 460V, 60Hz, 3PH
 AMPS 8.7
 TOTAL WATTS 3620

IN RUSH AMPS 60
 PLUG TYPE L16-20P
 EER 10.0

COMPRESSOR SCROLL
 COMPRESSOR HP 3
 COMPRESSOR LRA 35

EVAP CFM - HIGH 1200
 EVAP MOTOR HP 1/3

COND CFM 1390
 COND MOTOR HP 1

CONDENSATE TANK 5 GALLON
 (Pump Optional)

REFRIGERANT CHARGE 66 oz R-410A

HEIGHT 50-1/4 in
 WIDTH 27-1/2 in
 DEPTH 35 in

NET WEIGHT 400 lb



AIR COOLED



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

- OA **Cooling Capacity** is total BTUH at 80°DB/67°WB return air 95°F Outdoor at high fan speed
- OA Dedicated Circuit and Time Delay fuses/circuit breakers are recommended
- OA EER is determined at high fan speed, with condenser discharge air ducted into separate area
- OA CFM with free discharge
- OA Amps & Watts at 460 Volts

COOLING AMBIENT OPERATING RANGE 65° TO 105°

NOT APPROVED FOR OUTDOOR USE



Cooling done Right!
OCEANAIRE


OCEANAIRE-INC.COM
 OA-TS-PAC3634-05012020



PRODUCT FEATURES

- OA 24V CONTROL CIRCUIT WITH NON-PROGRAMMABLE ELECTRONIC THERMOSTAT
- OA SWIVEL BALL BEARING CASTERS WITH LOCKING FRONTS
- OA 2-SPEED FAN SWITCH
- OA CONDENSATE OVERFLOW ALERT LIGHT
- OA HIGH PRESSURE SAFETY SWITCH
- OA WASHABLE ELECTROSTATIC AIR FILTER
- OA THREE PHASE MONITOR

Optional ACCESSORIES

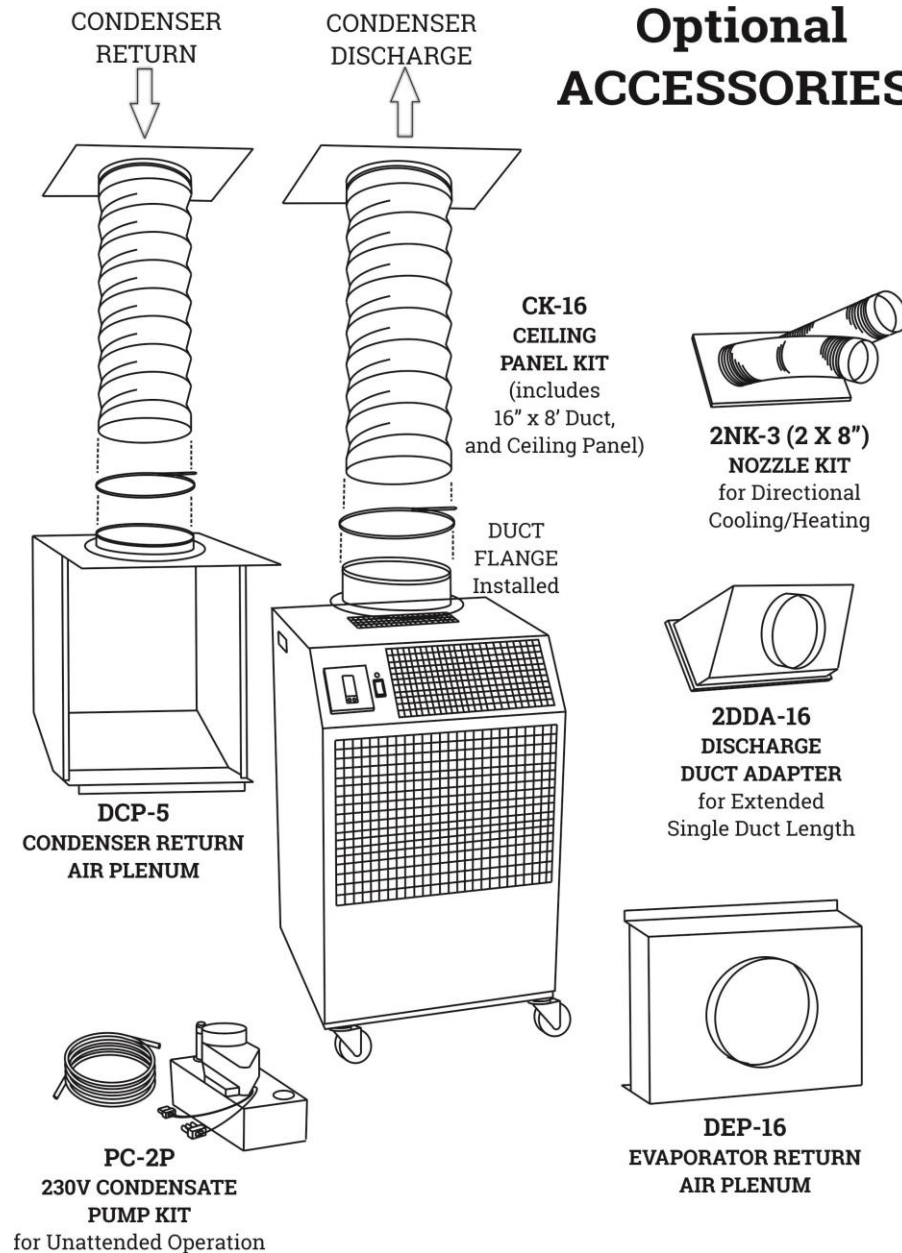

Cooling done Right!
OCEANAIRE