

# OCEANAIRE

**MODEL: PAC6034**  
**5 TON PORTABLE SPOT COOLER**

## TECHNICAL SPECIFICATIONS

<b>COOLING CAPACITY</b>	<b>60,100 BTUH</b>
VOLTAGE	460V, 60Hz, 3PH
AMPS	14.8
TOTAL WATTS	6000
IN RUSH AMPS	87
PLUG TYPE	L16-20P
EER	10.0
COMPRESSOR	SCROLL
COMPRESSOR HP	5
COMPRESSOR LRA	52
EVAP CFM - HIGH	1950
EVAP MOTOR HP	1
COND CFM	2200
COND MOTOR HP	1
CONDENSATE REMOVAL	PUMP – 20' LIFT
REFRIGERANT CHARGE	80 oz R-410A
HEIGHT	51-3/4 in
WIDTH	27-1/2 in
DEPTH	39-1/2 in
NET WEIGHT	520 lb



### SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

- OA **Cooling Capacity** is total BTUH at 80°DB/67°WB return air 95°F Outdoor at high fan speed
- OA Dedicated Circuit and Time Delay fuses/circuit breakers are recommended
- OA EER is determined at high fan speed, with condenser discharge air ducted into separate area
- OA CFM with free discharge
- OA Amps & Watts at 460 Volts

**COOLING AMBIENT** OPERATING RANGE 65° TO 105°

**NOT APPROVED FOR OUTDOOR USE**



*Cooling done Right!*  
**OCEANAIRE**

OCEANAIRE-INC.COM  
OA-TS-PAC6034-05012020

# OCEANAIRE


**MODEL: PAC6034**  
**5 TON PORTABLE SPOT COOLER**

## PRODUCT FEATURES


- OA 24V CONTROL CIRCUIT WITH NON-PROGRAMMABLE ELECTRONIC THERMOSTAT
- OA SWIVEL BALL BEARING CASTERS WITH LOCKING FRONTS
- OA 2-SPEED FAN SWITCH
- OA CONDENSATE OVERFLOW ALERT LIGHT
- OA HIGH PRESSURE SAFETY SWITCH
- OA WASHABLE ELECTROSTATIC AIR FILTER
- OA THREE PHASE MONITOR




## Optional ACCESSORIES

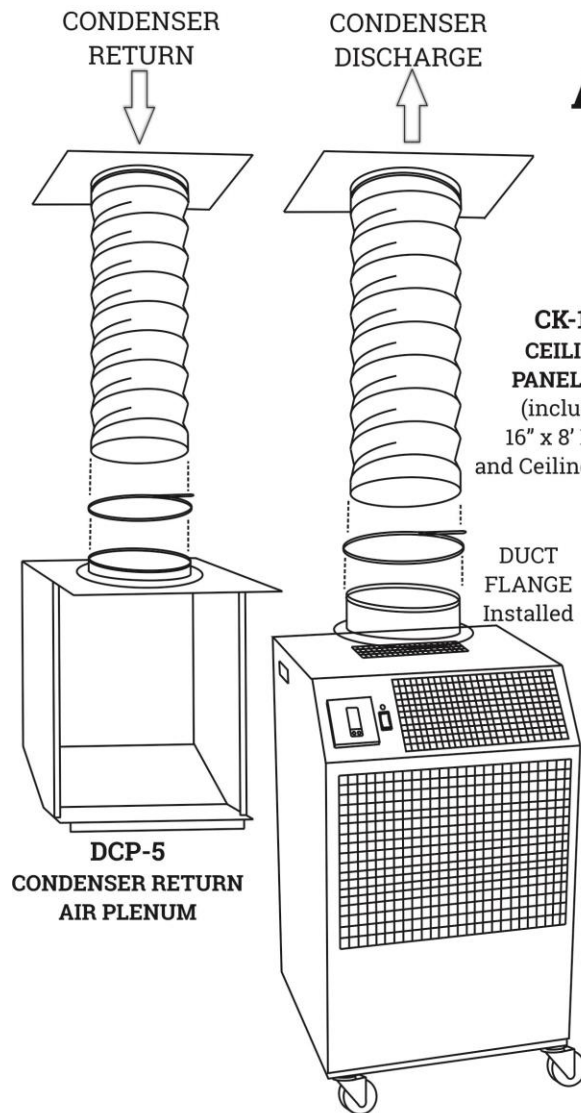


**CK-16**  
**CEILING**  
**PANEL KIT**  
(includes  
16" x 8' Duct,  
and Ceiling Panel)



**2NK-3 (2 X 8")**  
**NOZZLE KIT**  
for Directional  
Cooling/Heating



**2DDA-16**  
**DISCHARGE**  
**DUCT ADAPTER**  
for Extended  
Single Duct Length



**DEP-16**  
**EVAPORATOR RETURN**  
**AIR PLENUM**

*Cooling done Right!*  
**OCEANAIRE**

OCEANAIRE-INC.COM  
OA-TS-PAC6034-05012020