

OCEANAIRE

PORTABLE

AIR CONDITIONERS + HEAT PUMPS



AIR COOLED



WATER COOLED



HEATING & COOLING

PROVIDING A BETTER CLIMATE...
ANYWHERE



oceanaire-inc.com

6228 Oakton Street Morton Grove, IL 60053



OA-SL-PROD-01012019

THE OCEANAIRE STORY.....

WE DESIGN - With over 20 years of experience in portable cooling, Oceanaire offers the industry's broadest line of products for temporary cooling and heating needs. As the industry design leaders, we offer six families of products ranging from 1 Ton to 5 Tons of cooling capacity, in a variety of power options. With an extensive offering of custom product options and accessories, we are confident that Oceanaire can provide you with the right product for the job.



WE MANUFACTURE - Oceanaire products are skillfully manufactured in our 22,000 sq. ft. facility in Morton Grove, IL. We actively maintain an inventory of over 150 units ready to ship when that emergency need arises.

Oceanaire products are UL Listed, thoroughly tested prior to shipment, and come with a full 1 year warranty plus 4 years of additional warranty on the compressor.

WE TRAIN - We believe in helping you and your staff get the most out of our products. Oceanaire works closely with its distributors on product training and application support. **Our success is directly linked to your success!**



WE SUPPORT - Our customer service and technical support staff are here to serve you with application assistance and unparalleled service - before and after the sale. From building cooling & heating, to food service, to specialty manufacturing, we are here to assist with your project. With a highly flexible manufacturing system, Oceanaire is able to design, build to order and ship product for the most demanding application.

WE OFFER



Air Cooled Portables (Spot Coolers) - Oceanaire offers a full line of air cooled portable units in Standard and Deluxe Models, with cooling capacities ranging from 1 Ton to 5 Tons. With 3-Ton and 5-Ton models available in single and three phase power, Oceanaire is the preferred choice of building engineers.



Water Cooled Portables - Oceanaire offers a full line of water cooled portable air conditioners in Standard and Deluxe Models. Cooling capacities range from 1 Ton to 5 Tons, with multiple voltages offered for the larger models. Water cooled portable AC units provide cooling in challenging applications.



Portable Heat Pumps - Oceanaire pioneered the development of the portable heat pump, with the first models being released in 2000. Oceanaire offers a full line of Deluxe Portable Heat Pump models with COOLING and HEATING capacities ranging from 1 Ton to 5 Tons.



Call the Keep Cool Team!
(847) 583-0311



2OACH Series

Portable Heat Pump - Air Cooled



MODEL: 2OACH	1211	1811	2412	3612	3632	3634	6012	6032	6034
COOLING CAPACITY	11,800	16,800	24,020	36,050			60,100		
HEATING CAPACITY	11,000	15,600	22,000	32,500			53,500		
VOLTAGE (V/Phase) at 60Hz	115/1		208-230/1		208-230/3	460/3	208-230/1	208-230/3	460/3
AMPS	10.4	14.1	14.9	19.6	17.2	8.7	32.0	20.4	14.8
TOTAL WATTS	1180	1670	2700	3620			6000		
IN-RUSH CURRENT (AMPS)	60	75	68	113	93	60	178	162	87
PLUG TYPE	5-15P	5-20P	6-20P	6-30P	L15-30P	L16-20P	6-50P	L15-30P	L16-20P
EER	10.0		8.9	10.0					
COMPRESSOR HP	1	1 1/2	2	3			5		
COMPRESSOR RLA	9.5	12.3	10.5	13.6	8.8	5.0	27.6	18.1	9.0
COMPRESSOR LRA	50	63	48	83	77	35	158	137	62
EVAP CFM	400	600	810	1200			1950		
EVAP MOTOR HP	1/8		1/3			1			
CONDENSER CFM	580	930	1010	1390			2200		
COND MOTOR HP	1/8		1/3	1					
CONDENSATE	5 Gallon Condensate Tank - STANDARD (Pump Optional)						Pump - STANDARD (20 ft. Lift)		
R-410A CHARGE (oz.)	18	40	37	66			80		
(A) HEIGHT (in.)	37-3/4	45-3/4		50-1/4			51-3/4		
(B) WIDTH (in.)	20	24		27-1/2					
(C) DEPTH (in.)	25	30		35			39-1/2		
NET WEIGHT (lb.)	180	260		365		400	485		520

2OACHSPEC010119

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

Cooling Ambient Operating Range 65°F To 105°F


Heating Ambient Operating Range 40°F To 85°F



NOT APPROVED FOR OUTDOOR USE


PRODUCT FEATURES

- OA SOLID STATE ELECTRONIC CONTROLLER
- OA AUTOMATIC MODE CHANGEOVER
- OA MANUAL OR AUTO 6-SPEED FAN CONTROL
- OA LARGE LED DISPLAY
- OA REAR SWIVEL CASTERS
- OA FRONT SWIVEL CASTERS - WITH BRAKES
- OA CONDENSATE ALERT
- OA LCDI POWER CORD - SOME MODELS
- OA HIGH PRESSURE SAFETY SWITCH
- OA WASHABLE ELECTROSTATIC AIR FILTERS

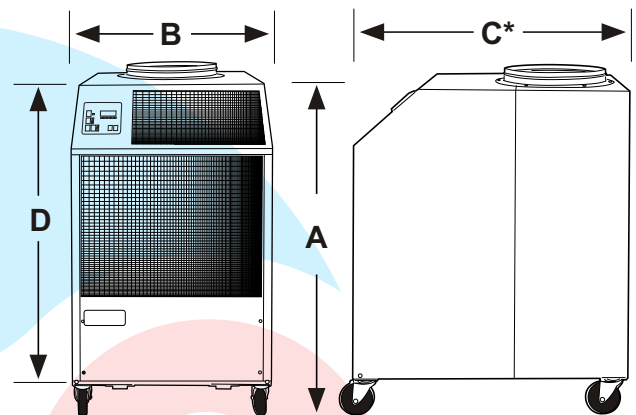

* Condenser Return Air Plenums
2DCP-1 and 2DCP-2 add 13 inches to "C"
DCP-5 adds 17 inches to "C"

Cooling and Heating done Right!

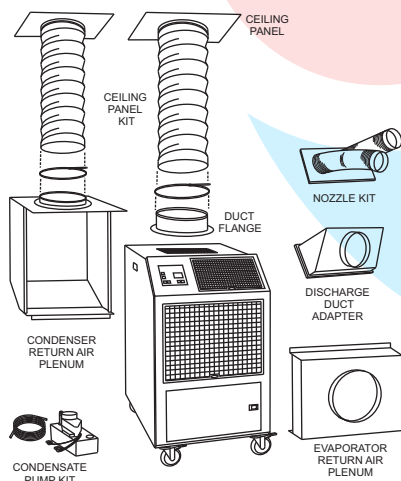

NOZZLE KIT

2NK-1	2 X 4-INCH NOZZLES
2NK-2	2 X 6-INCH NOZZLES
2NK-3	2 X 8-INCH NOZZLES

CEILING PANEL KIT

CK-12	2 x 2 PANEL w/duct & flange	12, 18, 24
CK-16	2 x 2 PANEL with duct	36, 60

CONDENSATE PUMP KIT

2DPC-1	115V PUMP KIT, DELUXE	12, 18
2DPC-2	230V PUMP KIT, DELUXE	24, 36

(Condensate pumps are installed in 2OACH60's)

DUCT FLANGE

DF-12	12-INCH DUCT FLANGE	12, 18, 24
-------	---------------------	------------

(Sold Separately)

DF-16	16-INCH DUCT FLANGE	36, 60
-------	---------------------	--------

(2OACH36's and 2OACH60's are shipped with 16" duct flange)

MODEL

12
18, 24
36, 60

EVAPORATOR RETURN AIR PLENUM MODEL

DEP-10	10-INCH	12
2DEP-12	12-INCH	18, 24
DEP-16	16-INCH	36, 60

DISCHARGE DUCT ADAPTER

2DDA-6	6-INCH	12
2DDA-10	10-INCH	18, 24
2DDA-16	16-INCH	36, 60

CONDENSER RETURN AIR PLENUM

2DCP-1	12-INCH	12
2DCP-2	12-INCH	18, 24
DCP-5	16-INCH	36, 60



20AC Series

Deluxe Portable Spot Cooler - Air Cooled



MODEL: 20AC	1211	1811	2412	3612	3632	3634	6012	6032	6034
COOLING CAPACITY	11,800	16,800	24,020	36,050			60,100		
VOLTAGE (V/Phase) at 60Hz	115/1		208-230/1		208-230/3	460/3	208-230/1	208-230/3	460/3
AMPS	10.4	14.1	14.9	19.6	17.2	8.7	32.0	20.4	14.8
TOTAL WATTS	1180	1670	2700	3620			6000		
IN-RUSH CURRENT (AMPS)	60	75	68	113	93	60	178	162	87
PLUG TYPE	5-15P	5-20P	6-20P	6-30P	L15-30P	L16-20P	6-50P	L15-30P	L16-20P
EER	10.0		8.9	10.0					
COMPRESSOR HP	1	1 1/2	2	3			5		
COMPRESSOR RLA	9.5	12.3	10.5	13.6	8.8	5.0	27.6	18.1	9.0
COMPRESSOR LRA	50	63	48	83	77	35	158	137	62
EVAP CFM	400	600	810	1200			1950		
EVAP MOTOR HP	1/8		1/3				1		
CONDENSER CFM	580	930	1010	1390			2200		
COND MOTOR HP	1/8		1/3	1					
CONDENSATE	5 Gallon Condensate Tank - STANDARD (Pump Optional)						Pump - STANDARD (20 ft. Lift)		
R-410A CHARGE (oz.)	18	40	37	66			80		
(A) HEIGHT (in.)	37-3/4	45-3/4		50-1/4			51-3/4		
(B) WIDTH (in.)	20	24		27-1/2					
(C) DEPTH (in.)	25	30		35			39-1/2		
NET WEIGHT (lb.)	180	260		365		400	485		520

20ACSPEC5010119

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE


Cooling Ambient Operating Range 65°F To 105°F



NOT APPROVED FOR OUTDOOR USE


PRODUCT FEATURES

- OA SOLID STATE ELECTRONIC CONTROLLER
- OA MANUAL OR AUTO 6-SPEED FAN CONTROL
- OA LARGE LED DISPLAY
- OA REAR SWIVEL CASTERS
- OA FRONT SWIVEL CASTERS - WITH BRAKES
- OA CONDENSATE ALERT
- OA LCDI POWER CORD - SOME MODELS
- OA HIGH PRESSURE SAFETY SWITCH
- OA WASHABLE ELECTROSTATIC AIR FILTERS

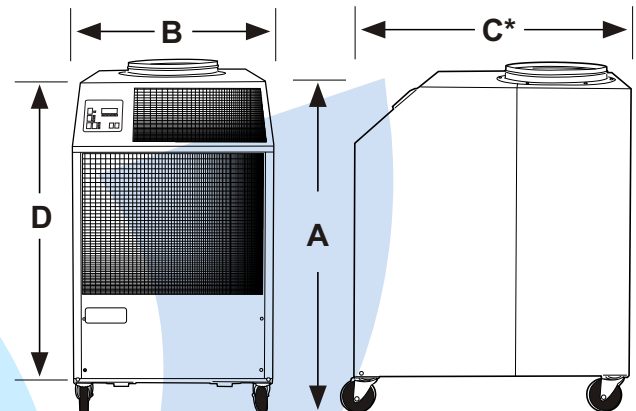

* Condenser Return Air Plenums
2DCP-1 and 2DCP-2 add 13 inches to "C"
DCP-5 adds 17 inches to "C"

Call the *Keep Cool Team!*

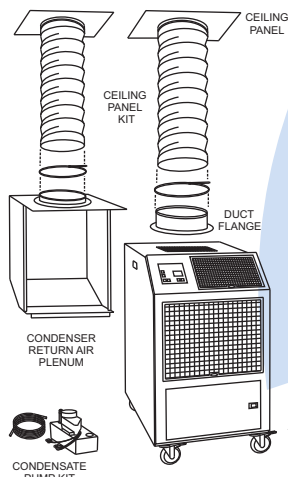

NOZZLE KIT

2NK-1	2 X 4-INCH NOZZLES
2NK-2	2 X 6-INCH NOZZLES
2NK-3	2 X 8-INCH NOZZLES

CEILING PANEL KIT

CK-12	2 x 2 PANEL w/duct & flange	12, 18, 24
CK-16	2 x 2 PANEL with duct	36, 60

CONDENSATE PUMP KIT

2DPC-1	115V PUMP KIT, DELUXE	12, 18
2DPC-2	230V PUMP KIT, DELUXE	24, 36

(Condensate pumps are installed in 20AC60's)

DUCT FLANGE

DF-12	12-INCH DUCT FLANGE	12, 18, 24
DF-16	16-INCH DUCT FLANGE	36, 60

(Sold Separately)
(20AC36's and 20AC60's are shipped with 16" duct flange)

MODEL

EVAPORATOR RETURN AIR PLENUM

DEP-10	10-INCH	12
2DEP-12	12-INCH	18, 24
DEP-16	16-INCH	36, 60

DISCHARGE DUCT ADAPTER

2DDA-6	6-INCH	12
2DDA-10	10-INCH	18, 24
2DDA-16	16-INCH	36, 60

CONDENSER RETURN AIR PLENUM

2DCP-1	12-INCH	12
2DCP-2	12-INCH	18, 24
DCP-5	16-INCH	36, 60



PAC Series

Portable Spot Cooler - Air Cooled



MODEL: PAC	1211	1811	2412	3612	3632	3634	6012	6032	6034	
COOLING CAPACITY	11,800	16,800	24,020	36,050			60,100			
VOLTAGE (V/Phase) at 60Hz	115/1		208-230/1		208-230/3		460/3	208-230/1	208-230/3	460/3
AMPS	10.4	14.1	14.9	19.6	17.2	8.7	32.0	20.4	14.8	
TOTAL WATTS	1180	1670	2700	3620			6000			
IN-RUSH CURRENT (AMPS)	60	75	68	113	93	60	178	162	87	
PLUG TYPE	5-15P	5-20P	6-20P	6-30P	L15-30P	L16-20P	6-50P	L15-30P	L16-20P	
EER	10.0		8.9	10.0						
COMPRESSOR HP	1	1 1/2	2	3			5			
COMPRESSOR RLA	9.5	12.3	10.5	13.6	8.8	5.0	27.6	18.1	9.0	
COMPRESSOR LRA	50	63	48	83	77	35	158	137	62	
EVAP CFM	400	600	810	1200			1950			
EVAP MOTOR HP	1/8		1/3			1				
CONDENSER CFM	580	930	1010	1390			2200			
COND MOTOR HP	1/8		1/3	1						
CONDENSATE	5 Gallon Condensate Tank - STANDARD (Pump Optional)						Pump - STANDARD (20 ft. Lift)			
R-410A CHARGE (oz.)	18	40	37	66			80			
(A) HEIGHT (in.)	37-3/4	45-3/4		50-1/4			51-3/4			
(B) WIDTH (in.)	20	24		27-1/2						
(C) DEPTH (in.)	25	30		35			39-1/2			
NET WEIGHT (lb.)	180	260	365			400	485		520	

PACSPECSD010119

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE


Cooling Ambient Operating Range 65°F To 105°F



NOT APPROVED FOR OUTDOOR USE


PRODUCT FEATURES

- OA NON-PROGRAMMABLE ELECTRONIC THERMOSTAT
- OA 24 VOLT CONTROL CIRCUIT
- OA 2-SPEED FAN SWITCH
- OA REAR SWIVEL CASTERS
- OA FRONT SWIVEL CASTERS - WITH BRAKES
- OA CONDENSATE ALARM LIGHT
- OA LCDI POWER CORD - SOME MODELS
- OA HIGH PRESSURE SAFETY SWITCH
- OA WASHABLE AIR FILTERS

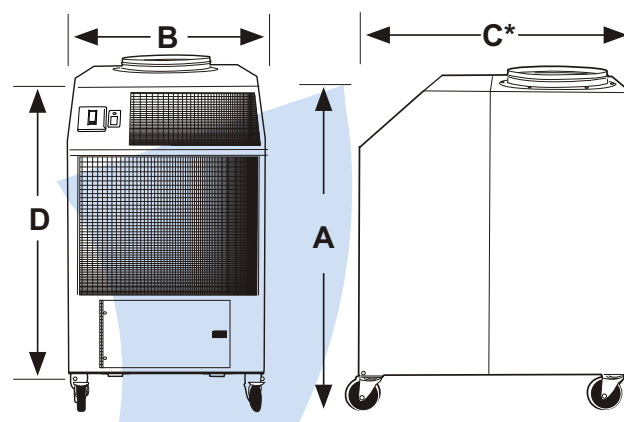

* Condenser Return Air Plenums
2DCP-1 and 2DCP-2 add 13 inches to "C"
DCP-5 adds 17 inches to "C"

Proudly Made in America

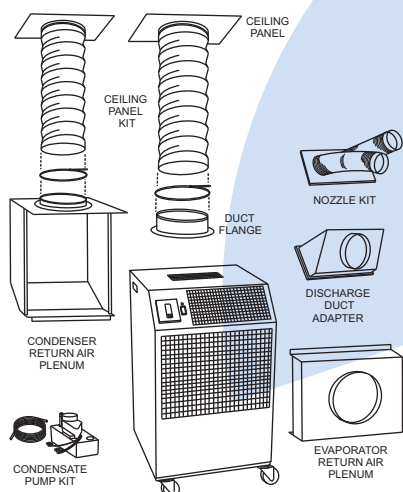

NOZZLE KIT

2NK-1	2 X 4-INCH NOZZLES
2NK-2	2 X 6-INCH NOZZLES
2NK-3	2 X 8-INCH NOZZLES

MODEL

12
18, 24
36, 60

EVAPORATOR RETURN AIR PLENUM MODEL

DEP-10	10-INCH	12
2DEP-12	12-INCH	18, 24
DEP-16	16-INCH	36, 60

CEILING PANEL KIT

CK-12	2 x 2 PANEL w/duct & flange	12, 18, 24
CK-16	2 x 2 PANEL with duct	36, 60

DISCHARGE DUCT ADAPTER

2DDA-6	6-INCH	12
2DDA-10	10-INCH	18, 24
2DDA-16	16-INCH	36, 60

CONDENSATE PUMP KIT

PC-1P	115V PUMP KIT	12, 18
PC-2P	230V PUMP KIT	24, 36

(Condensate pumps are installed in PAC60's)

CONDENSER RETURN AIR PLENUM

2DCP-1	12-INCH	12
2DCP-2	12-INCH	18, 24
DCP-5	16-INCH	36, 60

DUCT FLANGE

DF-12	12-INCH DUCT FLANGE	12, 18, 24
-------	---------------------	------------

(Sold Separately)

DF-16	16-INCH DUCT FLANGE	36, 60
-------	---------------------	--------

(PAC36's and PAC60's are shipped with 16" duct flange)



OWC Series

Deluxe Portable Air Conditioner - Water Cooled

MODEL: OWC	1211	1811	2412	3612	3632	3634	6012	6032	6034
COOLING CAPACITY	12,000	18,000	23,950	36,100			60,100		
VOLTAGE (V/Phase) at 60Hz	115/1		208-230/1		208-230/3	460/3	208-230/1	208-230/3	460/3
UNIT AMPS	8.1	11.3	9.9	12.0	9.3	4.7	23.7	16.5	6.3
UNIT WATTS	930	1300	2100	2700			5000		
IN-RUSH CURRENT (AMPS)	56	69	55	100	80	48	165	149	75
PLUG TYPE	5-15P	5-20P	6-20P	6-20P	L15-20P	L16-20P	6-30P	L15-30P	L16-20P
EER	12.9	13.8	11.4	13.4			12.0		
COMPRESSOR HP	1	1 1/2	2	3			5		
COMPRESSOR RLA	9.5	12.3	10.5	13.6	8	5.0	27.6	18.1	9.0
COMPRESSOR LRA	50	63	48	83	77	35	158	137	62
EVAP CFM	400	600	810	1200			1950		
EVAP MOTOR HP	1/8		1/3			1			
COND WATER FLOW (GPM) AT 60°F INLET	0.75	1.1	1.55	2.2			3.8		
AT 85°F INLET	3	4.5	6	9			15		
COND COIL PRESSURE DROP - PSI	0.4								
WATER VALVE PRESSURE DROP - PSI	2.0								
WATER VALVE CONNECTION	3/8 MF				5/8 MF				
DRAIN (RETURN) CONNECTION	3/8 MF				5/8 MF				
CONDENSATE PUMP (ALL UNITS)	20 FT LIFT - 3/8 MF CONNECTION ON UNIT - DRAIN								
R-410A CHARGE (oz.)	14	18	16	24			52		
(A) HEIGHT (in.)	33-3/4	39-3/4		50-1/4			51-1/2		
(B) WIDTH (in.)	20-1/8	24-1/4		28-1/4			27		
(C) DEPTH (in.)	13-1/8	13		18			29		
NET WEIGHT (lb.)	125	155	170	275		310	375		410

OWCSPEC010119





SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

Cooling Ambient Operating Range 65°F To 105°F

NOT APPROVED FOR OUTDOOR USE

PRODUCT FEATURES


- OA SOLID STATE ELECTRONIC CONTROLLER
- OA LARGE LED DISPLAY
- OA MANUAL OR AUTO 6-SPEED FAN CONTROL
- OA AUTOMATIC CONDENSATE PUMP
- OA PUMP OVERFLOW ALERT
- OA WATER REGULATING VALVE
- OA REAR SWIVEL CASTERS
- OA FRONT SWIVEL CASTERS - WITH BRAKES
- OA LCDI POWER CORD - SOME MODELS
- OA HIGH PRESSURE SAFETY SWITCH
- OA WASHABLE ELECTROSTATIC AIR FILTER

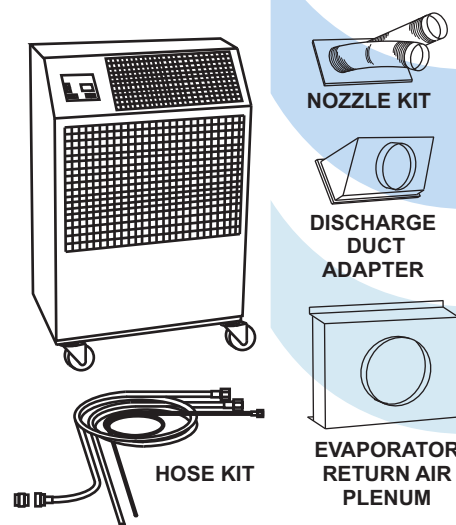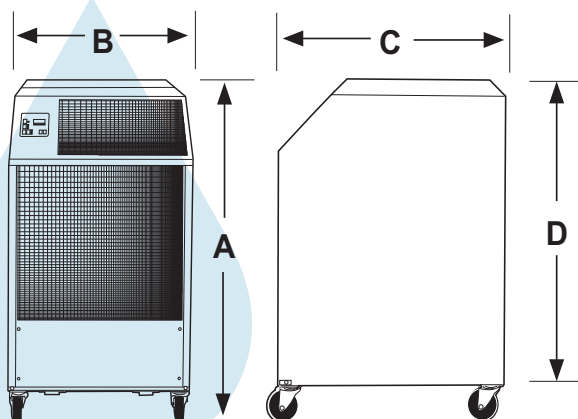

NOZZLE KIT



DISCHARGE DUCT ADAPTER



EVAPORATOR RETURN AIR PLENUM

NOZZLE KIT

NK-1	(2 X 4-INCH)	12
NK-2	(2 X 6-INCH)	18, 24
2NK-3	(2 X 8-INCH)	36, 60

MODEL

HOSE KIT

HK-1	(10 FT)
HK-2	(25 FT)
HK-5	(40 FT)

MODEL

12, 18, 24
12, 18, 24
12, 18, 24

EVAPORATOR RETURN AIR PLENUM

DEP-10	(10-INCH)	12
2DEP-12	(12-INCH)	18, 24
DEP-16	(16-INCH)	36, 60

HK-3	(10 FT)
HK-4	(25 FT)
HK-6	(40 FT)

36, 60
36, 60
36, 60

DISCHARGE DUCT ADAPTER

DDA-6	(6-INCH)	12
DDA-10	(10-INCH)	18, 24
2DDA-16	(16-INCH)	36, 60

QC HOSE KIT
HK-5QC (40 FT)
HK-6QC (40 FT)

MODEL

OWC1811QC
OWC6012QC
OWC6032QC
OWC6034QC



PWC Series

Portable Air Conditioner - Water Cooled



MODEL: PWC	1211	1811	2412	3612	3632	3634	6012	6032	6034
COOLING CAPACITY	12,000	18,000	23,950	36,100			60,100		
VOLTAGE (V/Phase) at 60Hz	115/1		208-230/1		208-230/3	460/3	208-230/1	208-230/3	460/3
UNIT AMPS	8.1	11.3	9.9	12.0	9.3	4.7	23.7	16.5	6.3
UNIT WATTS	930	1300	2100	2700			5000		
IN-RUSH CURRENT (AMPS)	56	69	55	100	80	48	165	149	75
PLUG TYPE	5-15P	5-20P	6-20P	6-20P	L15-20P	L16-20P	6-30P	L15-30P	L16-20P
EER	12.9	13.8	11.4	13.4			12.0		
COMPRESSOR HP	1	1 1/2	2	3			5		
COMPRESSOR RLA	9.5	12.3	10.5	13.6	8.8	5.0	27.6	18.1	9.0
COMPRESSOR LRA	50	63	48	83	77	35	158	137	62
EVAP CFM	400	600	810	1200			1950		
EVAP MOTOR HP	1/8		1/3			1			
COND WATER FLOW (GPM) AT 60°F INLET	0.75	1.1	1.55	2.2			3.8		
AT 85°F INLET	3	4.5	6	9			15		
COND COIL PRESSURE DROP - PSI	0.4								
WATER VALVE PRESSURE DROP - PSI	2.0								
WATER VALVE CONNECTION	3/8 MF				5/8 MF				
DRAIN (RETURN) CONNECTION	3/8 MF				5/8 MF				
CONDENSATE PUMP (ALL UNITS)	20 FT LIFT - 3/8 MF CONNECTION ON UNIT - DRAIN								
R-410A CHARGE (oz.)	14	18	16	24			52		
(A) HEIGHT (in.)	33-3/4	39-3/4		50-1/4			51-1/2		
(B) WIDTH (in.)	20-1/8	24-1/4		28-1/4			27		
(C) DEPTH (in.)	13-1/8	13		18			29		
NET WEIGHT (lb.)	125	155	170	275		310	375		410

PWCSPEC5010119

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE




Cooling Ambient Operating Range 65°F To 105°F



NOT APPROVED FOR OUTDOOR USE

PRODUCT FEATURES

- QA NON-PROGRAMMABLE ELECTRONIC THERMOSTAT
- QA 24 VOLT CONTROL CIRCUIT
- QA 2-SPEED FAN SWITCH
- QA AUTOMATIC CONDENSATE PUMP
- QA PUMP OVERFLOW ALERT LIGHT
- QA WATER REGULATING VALVE
- QA REAR SWIVEL CASTERS
- QA FRONT SWIVEL CASTERS - WITH BRAKES
- QA LCDI POWER CORD - SOME MODELS
- QA HIGH PRESSURE SAFETY SWITCH
- QA WASHABLE ELECTROSTATIC AIR FILTER

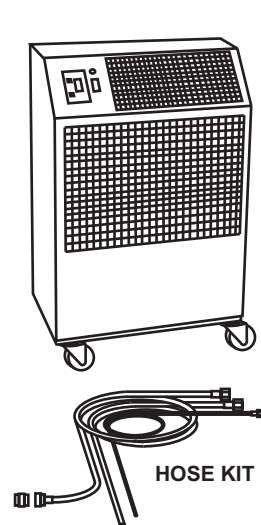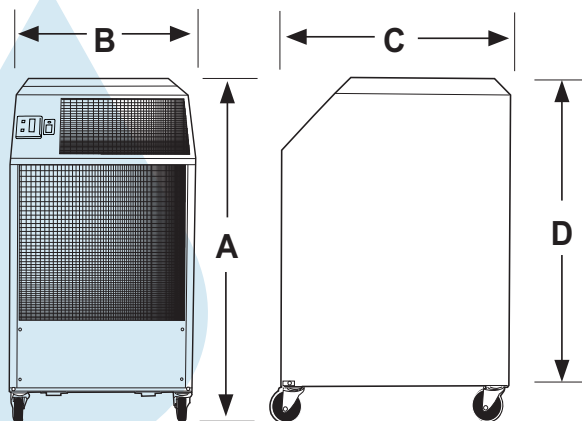

EVAPORATOR
RETURN AIR
PLENUM

NOZZLE KIT	MODEL
NK-1 (2 X 4-INCH)	12
NK-2 (2 X 6-INCH)	18, 24
2NK-3 (2 X 8-INCH)	36, 60

EVAPORATOR RETURN AIR PLENUM	MODEL
DEP-10 (10-INCH)	12
2DEP-12 (12-INCH)	18, 24
DEP-16 (16-INCH)	36, 60

DISCHARGE DUCT ADAPTER	MODEL
DDA-6 (6-INCH)	12
DDA-10 (10-INCH)	18, 24
2DDA-16 (16-INCH)	36, 60

HOSE KIT	MODEL
HK-1 (10 FT)	12, 18, 24
HK-2 (25 FT)	12, 18, 24
HK-5 (40 FT)	12, 18, 24

HK-3 (10 FT)	36, 60
HK-4 (25 FT)	36, 60
HK-6 (40 FT)	36, 60



CAC1211

Deluxe Specialized Spot Cooler - Air Cooled

COOLING CAPACITY	12,000 BTUH
VOLTAGE	115 V
COOLING AMPS	12.0 A
COOLING WATTS	1180 W
IN RUSH AMPS	63 A
EER	10.0

COMPRESSOR TYPE	ROTARY, 1 HP
COMPRESSOR RLA / LRA	9.5 A / 50 A

EVAPORATOR BLOWER	CENTRIFUGAL
EVAP CFM HIGH/LOW	400/320 CFM
EVAP MOTOR HP / AMPS	1/8 HP / 1.7 A


CONDENSER BLOWER	CENTRIFUGAL
COND CFM	490 CFM
COND MOTOR HP / AMPS	1/8 HP / 1.4 A

POWER CORD, 10 FT	14/3 (WITH LCDI)
PLUG TYPE	5-15P

CONDENSATE TANK CAPACITY	2 GALLON
--------------------------	----------

REFRIGERANT CHARGE	18 OZ., R-410A
--------------------	----------------

NET WEIGHT	135 lb
------------	--------

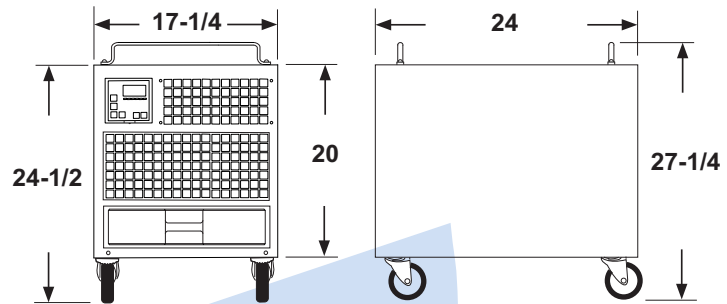

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

Cooling Ambient Operating Range 65°F To 105°F





NOT APPROVED FOR OUTDOOR USE

PRODUCT FEATURES

- QA SOLID STATE ELECTRONIC CONTROLLER
- QA LARGE LED DISPLAY
- QA MANUAL OR AUTO 6-SPEED FAN CONTROL
- QA REAR SWIVEL CASTERS
- QA FRONT SWIVEL CASTERS - WITH BRAKES
- QA CONDENSATE ALERT
- QA LCDI POWER CORD
- QA HIGH PRESSURE SAFETY SWITCH
- QA WASHABLE ELECTROSTATIC AIR FILTERS

"ENGINEERED SOLUTIONS"

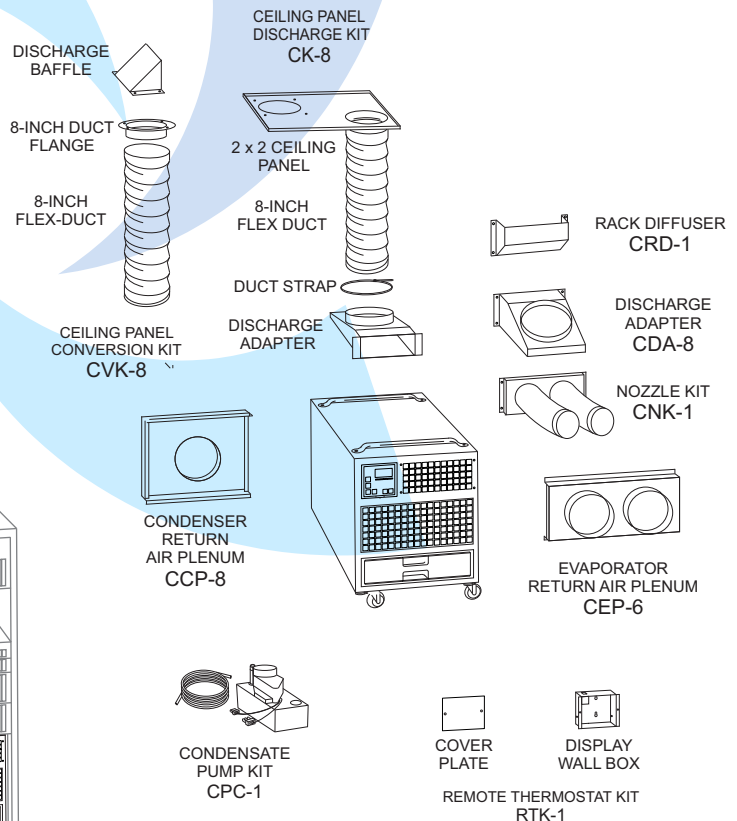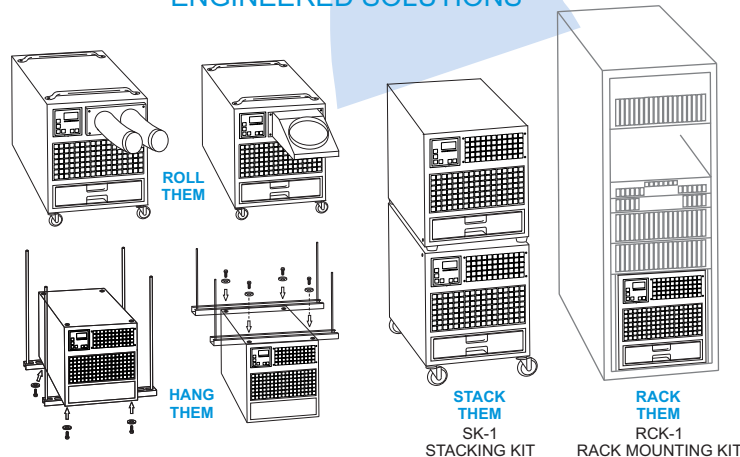

oceanair-inc.com
6228 Oakton Street Morton Grove, IL 60053



OA-SL-PROD-01012019