

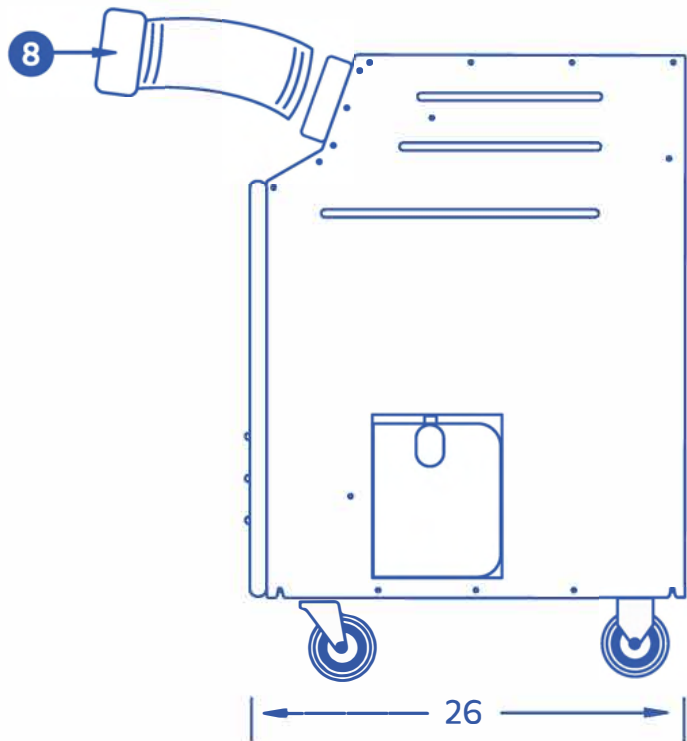
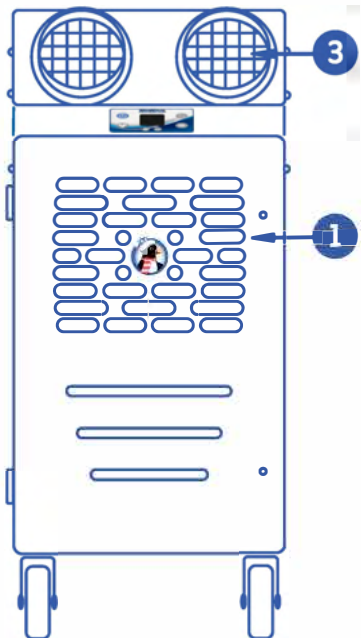


KPAC II

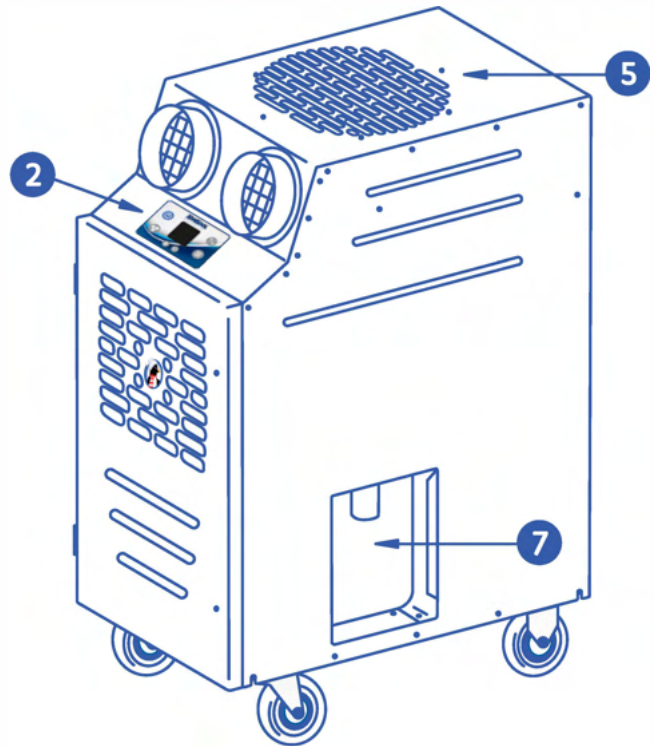

KPAC 1811-2

- | | |
|------------------------|---|
| 1) Cold Air Return | 5) Condensate Air Outlet |
| 2) Control Pad | 6) Power Cord |
| 3) Cold Air Supply | 7) Condensate Tank |
| 4) Condenser Air Inlet | 8) Air Chutes (Attach To Cold Air Supply) |

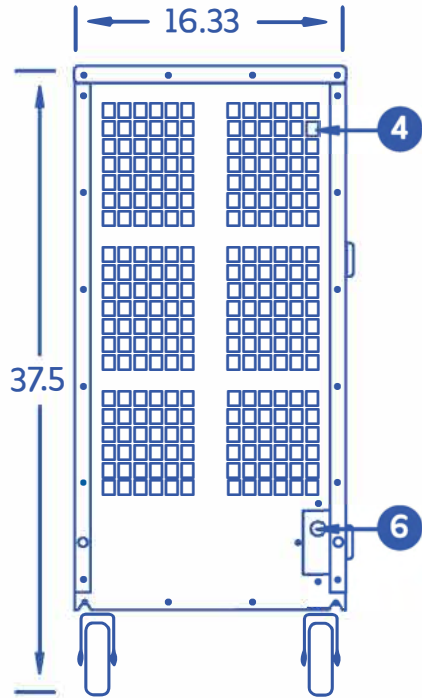

ETL LISTED CONFORMS TO ANSI/UL1995
CERTIFIED TO CAN/CSA 22.2 NO 235

KWIKOOL.COM

KPAC II



KPAC 1811-2

AIR COOLED PORTABLE

COOLING CAPACITY

BTU/hr @95 F at 60%RH

16,800 / 1.5-Ton

COMPRESSOR DATA

Compressor Type

Hermetic Rotary

Operating Temperatures

70-105°F 50% RH

Non-CFC Refrigerant

410A

FAN DATA EVAPORATOR

Fan Type (Centrifugal)

Direct Drive

Air Flow (CFM)

625 / Single Speed

Supply Air Control

Adjustable Vent

Supply Air Chute

2 - 5" dia x 16'

CONDENSER WATER FLOW

Fan Type (Centrifugal)

Direct Drive

Air Flow (CFM)

700

Condenser Duct Specs (optional)

1 - 12" Dia. x 8' length

Condenser Duct Max Length

25'

ELECTRICAL DATA

Power Supply

115 V / Single Phase

Current Consumption

15.2 Amps

Power Consumption

1.57 kW

Maximum Circuit Breaker

30 Amps

Recommended Breaker Size

20

Minimum Circuit Ampacity

19.7 Amps

Min/Max Voltage

105 - 125

Power Cord Gauge / Length in Feet

12 AWG / 8'

Plug Configuration

NEMA 5 - 20

DIMENSIONAL DATA

Width x Length x Height

16.325" x 26" x 37.75"

Weight

157 lbs.

Shipping Weight

207 lbs.

Ceiling Kit

22 lbs.

Shipping Weight W/ Ceiling Kit

229 lbs.

SAFETY DEVICE DATA

Compressor Overload

Internal

Fan Motor Overload

Automatic Internal

Evaporator Freeze Guard

Freeze Stat

High Pressure Switch

Manual

Low Pressure Switch

Auto

Compressor Short Cycle

Yes

Automatic Restart

Yes

Thermostat Type

Digital Microprocessor

Condensate Pump Overflow

Optional

Condensate Tank Overflow

Yes



We Manufacture Excellent Commercial Portable Cooling Equipment.

1-800-kwikool | sales@kwikool.com