



heat wagon

Model HVF410HD

Oil Indirect Fired Heater

- Dual output controls
High - 412,000 BTU, Low - 272,000 BTU
- Extra large fuel tank, 57 gallons
- Continuous run time over 30 hrs on low
(20 hours on high)
- Ductable up to 100'
- Capable of recirculation operation
for improved fuel savings
- Preheated fuel filter for reliable cold starting
- Runs on 15 Amp circuit

SPECIFICATIONS

Input	412,000 BTU/Hr (High) 272,000 BTU/Hr (Low)
Fuel	#1 or #2 Diesel, Kerosene, JP-8, Jet A
Fuel Consumption	2.89/1.86 GPH
Electrical	120 Volts 15 amp circuit
Fan	3250 CFM
Thermostat	Standard On/Off
Temp Rise	140°F @ 0°F Ambient (High) 105°F @ 0°F Ambient (Low)
Heat Output	354,000 BTU/Hr (High) 231,000 BTU/Hr (Low)
Flue Diameter	6"
Duct Size	20" with single outlet 16" with dual outlet
Dimensions	83"L x 33"W x 48"H
Weight	456 lbs.



Portable Air Group


Office: 1.919.240.5930
Toll-free: 1.866.948.5300
Fax: 1.866.948.5400
Web: portableairgroup.com

Portable Air Conditioners and Heat Pumps – Evaporative Coolers – Air Cooled Chillers – Water Cooled Chillers – DX – Air Handlers
Spot Coolers – Generators – Dehumidifiers – Heaters – HEPA Air Cleaners – Advanced BiPolar Ionization – Air Purifiers


Standard Features



Single Lift
Point
Bracket

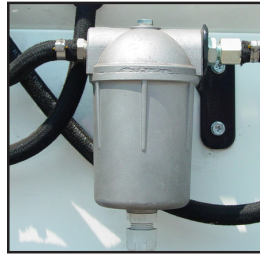


Preheated
Fuel Filter



Fork Lift
Pockets

Recirculation Mode

#ACC-AR412
Duct Adaptor

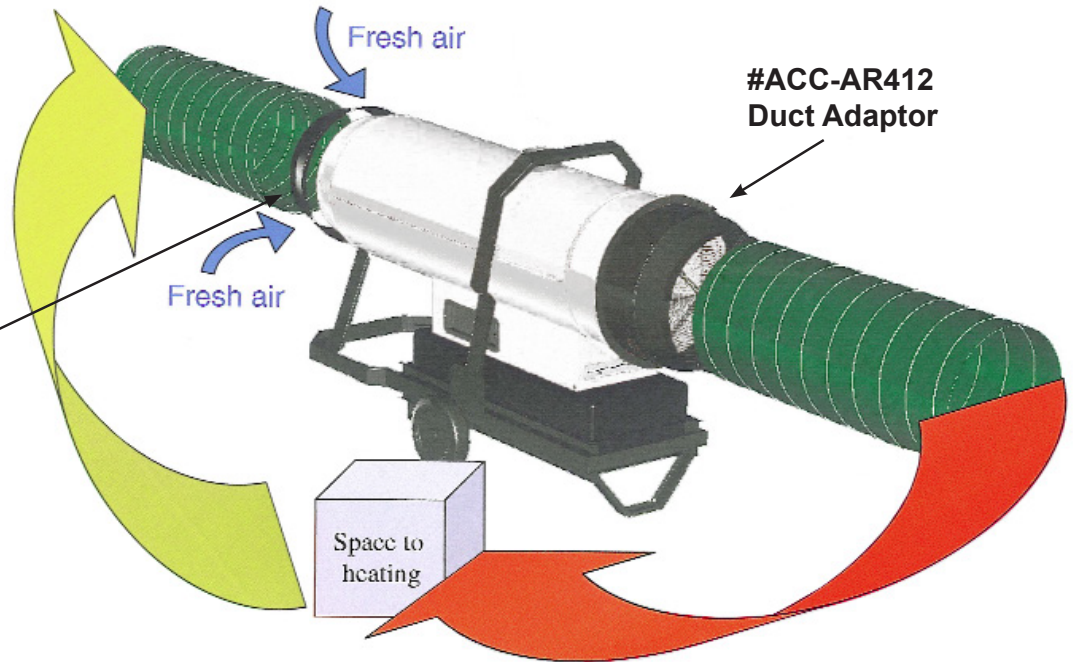

Remote Thermostat
(with 50' cord)
#ACC-THIDF

Optional Accessories




Flue Duct Kit
(with rain cap)
#ACC-EF1



Single Outlet Adaptor
#ACC-AR401



Duct
20" x 25' for single outlet
#ACC-WD2025
18" x 25' for 2-way outlet
#ACC-WD1825



2-way Outlet Adaptor
#ACC-AR402



Portable Air Group

Office: 1.919.240.5930
Toll-free: 1.866.948.5300
Fax: 1.866.948.5400
Web: portableairgroup.com